

Datasheet

Features

- Multi-function device with operating modes such as tachometer, counter, cycle time display,
- Position display, timer for running times, stop watch or process display
- Universal inputs (HTL / RS422) for encoders / sensors with NPN / PNP / NAMUR characteristics
- Bright and high-contrast display with event-dependent color variants
- Emulation of a 7-segment display inclusively icons and units
- Intuitive and simple parameterization through plain text and touchscreen
- Auxiliary voltage output 5/24 VDC for encoder supply
- Input frequency up to 1 MHz
- Linearization with 24 control points
- Numerous functions such as scaling, filters, start-up override
- Standard installation housing with 96 x 48 mm and IP65 protection



Mechanical data

Dimensions Housing Cut out	96 x 48 x 116 mm 91 x 43 mm
Material	ABS, UL 94 V-0
Weight	approx. 200 g
Display	LCD (backlight)
Display range	8 digits plus sign (-99999999 ... 99999999)
Digit height	13 mm
Color	red / green / yellow (switchable)
Operation	resistive touchscreen
Serial interface Format (option AO / CO) Format (option AR / CR) Baud rate	RS232 RS485 9600, 19200 or 38400 Baud
Storage temperature	-25 °C ... +70 °C
Operation temperature	-20 °C ... +60 °C
Conformity and standards EMV 2014/30/EU: NS 2014/35/EU: (only for option AC und RL) RoHS (II) 2011/65/EU RoHS (III) 2015/863:	EN 61326-1 EN 55011 / CISPR11 class A EN 61010-1 EN IEC 63000
Protection class front rear	IP65 IP20


Datasheet

Electrical data

Power supply DC Input voltage Protection circuit Consumption Fuse protection	18 ... 30 VDC reverse polarity protection approx. 100 mA (unloaded) extern T 0,5 A
Power supply AC Input voltage Protection circuit Fuse protection	(Option AC) 115 ... 230 VAC, 50 ... 60 Hz approx. 3 VA (unloaded) extern: T 0,1 A
Encoder supply DC version AC version	(EP35-I) 24 VDC (approx. 1 V lower than the power supply voltage), < 250 mA 24 VDC ($\pm 15\%$), (<150 mA bis 45°C / 80 mA ab 45°C)
Encoder supply DC version AC version	(EP355-I) 24 VDC approx. 1 V lower than the power supply voltage), < 250 mA or 5 VDC ($\pm 15\%$), < 250 mA 24 VDC ($\pm 15\%$), (<150 mA bis 45°C / 80 mA ab 45°C) or 5 VDC ($\pm 15\%$), < 250 mA
Incremental inputs Number of tracks Configuration Format Frequency Load	(EP35-I) 2 (A, B) PNP-; NPN-, Namur or Tri-State HTL (Low 0 ... 3 V, High 9 ... 30 V) < 250 kHz max. 6 mA / $R_i > 5 \text{ k}\Omega$ / 470 pF
Incremental inputs Number of tracks Configuration RS422 HTL differential HTL PNP / NPN Load	(EP355-I) 2 A, \bar{A} , B \bar{B} RS422, HTL differential, HTL PNP or HTL NPN max. 1 MHz (RS422 differential > 0,5 V) < 500 kHz (HTL differential signal > 2 V) < 250 kHz (Low 0 ... 3 V, High 9 ... 30 V) max. 2 mA / $R_i > 10 \text{ k}\Omega$ / 47 pF
Control inputs Number of inputs Format Frequency Load	3 HTL, PNP (Low 0 ... 3 V, High 9 ... 30 V) max. 10 kHz max. 2 mA / $R_i > 15 \text{ k}\Omega$ / 470 pF
Analog outputs Configuration Voltage output Current output Resolution Accuracy Reaction time	(Option AO / AR) Current or voltage output -10 ... +10 V (<2 mA) 0/4 ... 20 mA (burden <270 Ω) 16 Bit $\pm 0,1 \%$ 0°C ... +45°C $\pm 0,15 \%$ -20°C ... 0°C und +45°C...+60°C < 150 ms
Control outputs Number of outputs Format / level Current output Reaction time	(Option AO / AR / CO / CR) 4 5 ... 30 V (according to output voltage at OM+), PNP max. 200 mA < 1 ms
Relay outputs Number of outputs Configuration AC-Switching capacity DC-Switching capacity Reaction time	(Option RL) 2 potential free changeovers max. 250 VAC / 3 A / 750 VA max. 150 VDC / 2 A / 50 W < 20 ms

Datasheet

Dimensions

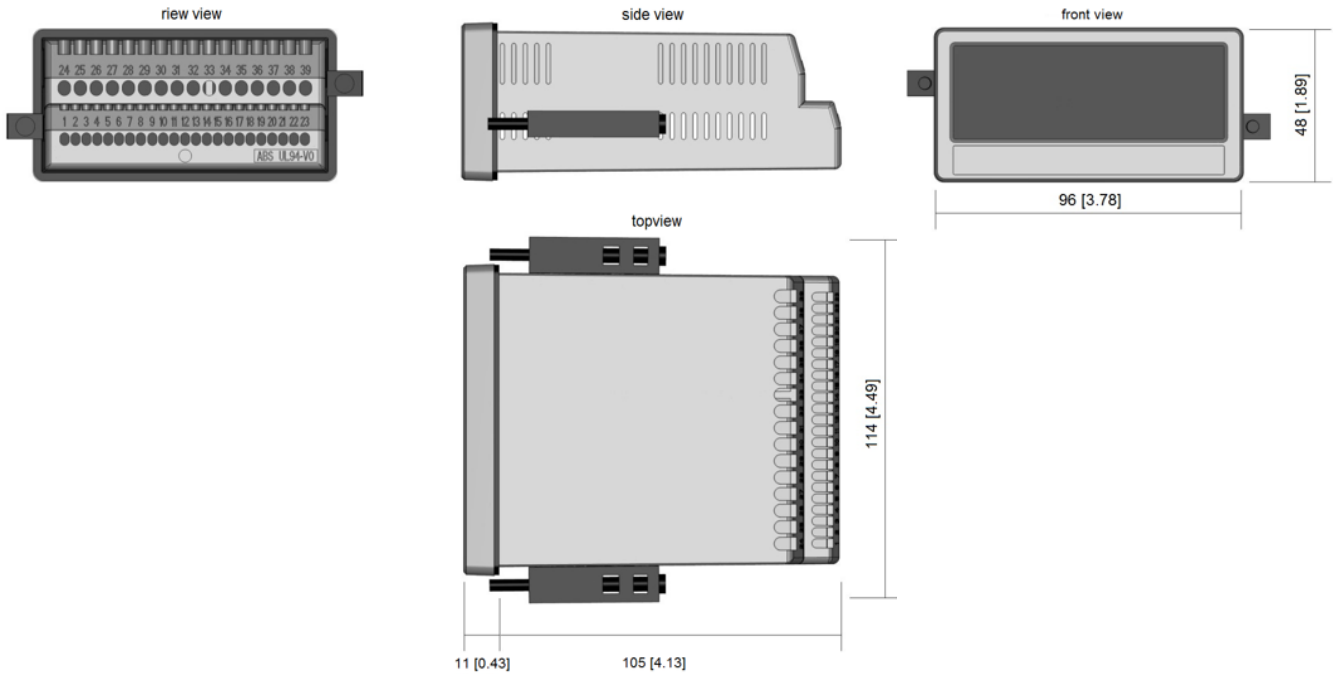

Available options

EP35-I: Basic unit with HTL-inputs (A, B), 3 control inputs, 5 / 24 VDC encoder supply
EP355-I: Basic unit with HTL / RS422-inputs (A, /A, B, /B), 5 / 24 VDC encoder supply

- Option **AC:** Power supply 115 / 230 VAC
- Option **AO:** 16-bit analogue output, 4 control outputs, serial RS232 interface
- Option **AR:** 16-bit analogue output, 4 control outputs, serial RS485 interface
- Option **CO:** 4 control outputs, serial RS232 interface
- Option **CR:** 4 control outputs, serial RS485 interface
- Option **RL:** 2 relay outputs

Options can be combined

Datasheet

Ordering example

Type EP35 - I - 24 - AC

EP35

EP355

Incremental

I = incremental

Encoder supply

24 = 24 VDC

5 = 5 VDC (only for Type EP355)

Option

AC = Power supply 115 / 230 VAC

AO = 16-bit analogue output, 4 control outputs, serial RS232 interface

AR = 16-bit analogue output, 4 control outputs, serial RS485 interface

CO = 4 control outputs, serial RS232 interface

CR = 4 control outputs, serial RS485 interface

RL = 2 relay outputs