

Datasheet

- Bellows Coupling - stainless steel bellows
- With clamping hubs
- Backlash-free and angularly aligned transmission of rotary motions
- Optimum compensation of misalignments
- High torsional stiffness
- Low restoring forces
- Vibration-damping effect





Mechanical Data

Material	Flange Bellows	aluminium anodised stainless steel
Weight		~ 18 g
Speed		< 10.000 min ⁻¹
Torque		< 100 Ncm
Offset of Shafts		radial ±0,3 mm axial ±0,5 mm angular ±4 °
Torsion Spring Stiffness		140 Nm/rad
Radial Spring Stiffness		10 N/mm
Moment of Inertia		15,2 gcm ²
Tightening Torque of Screw		< 100 Ncm
Temperature Range		-30 °C ... +120 °C

Dimensions

M2,5x10 ISO 4762 (2x)

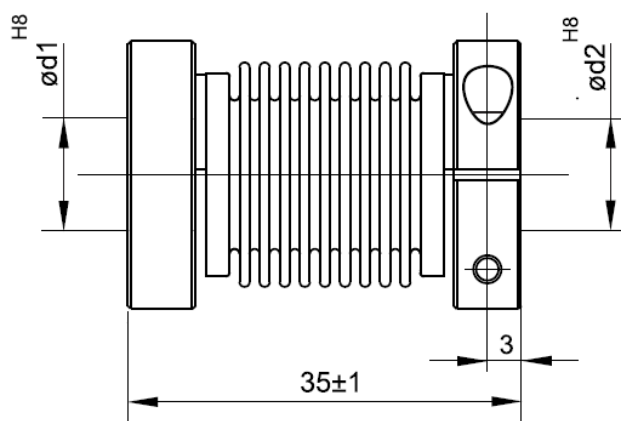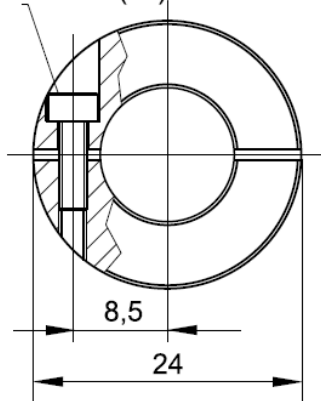

	Ø d2				Ordering Example
Ø d1	6	8	10	12	
6	X	X	X	X	
8		X	X	X	BKXK-2435-08-10
10			X	X	
12				X	